



CC6WXXX Triac

Constant Current & Dimmable Driver

Model: CC6WXXX Triac



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
CC3W120 Triac	120mA	0.06A	7W	2.28-3.6W	0.9	60%	19-30V	50V
CC3W180 Triac	180mA	0.06A	7W	2.34-3.78W	0.9	60%	13-21V	35V
CC3W200 Triac	200mA	0.06A	7W	2.6-4.2W	0.9	60%	13-21V	35V
CC3W260 Triac	260mA	0.06A	7W	2.08-3.38W	0.9	60%	8-13V	25V
CC3W300 Triac	300mA	0.06A	7W	2.4-3.9W	0.9	60%	8-13V	25V
CC3W350 Triac	350mA	0.06A	7W	2.8-4.55W	0.9	60%	8-13V	25V
CC6W120 Triac	120mA	0.08A	10.5W	4.32-6W	0.9	68%	36-50V	70V
CC6W180 Triac	180mA	0.08A	10.5W	4.86-7.02W	0.9	68%	27-39V	55V
CC6W200 Triac	200mA	0.08A	10.5W	3.8-6W	0.9	68%	19-30V	50V
CC6W250 Triac	250mA	0.08A	10.5W	3.25-5.25W	0.9	68%	13-21V	35V
CC6W300 Triac	300mA	0.08A	10.5W	3.9-6.3W	0.9	68%	13-21V	35V
CC6W350 Triac	350mA	0.08A	10.5W	4.55-7.35W	0.9	68%	13-21V	35V
CC6W400 Triac	400mA	0.08A	10.5W	3.2-5.2W	0.9	68%	8-13V	25V
CC6W450 Triac	450mA	0.08A	10.5W	3.6-5.85W	0.9	68%	8-13V	25V
CC6W500 Triac	500mA	0.08A	10.5W	4-6.5W	0.9	68%	8-13V	25V

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	Phase dimming
	Dimming Range	10%-100%
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC_stable
	Range of Input Voltage	198-264VAC_stable or 180-280VDC_stable
	Frequency	50/60Hz
	Input Current	≤0.08A
	Input Power	≤ 10.5W

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

	Power Factor	≥0.9 (230VAC,full load)
	No-load Power Consumption	≤1W @230VAC
	Inrush Current	≤8A/400us (230VAC,full load)
	Connected quantity of 16A Breaker	75pcs/type B ;120pcs/type C
Output	Current Accuracy	±5%
	Max. Output Power	7.35W
	Started Delay Time	≤1S (230VAC,full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin)/(Imax+Imin)
	PstLM	≤1
	SVM	≤0.4
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Insulation voltage	I/P to O/P , 3.0KVac/5mA/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 250 μ A
Environment	Ta/Operation Temperature	-20....+50℃
	Ts/Storage Temperature	-40....+85℃
	Tc/Enclosure Temperature	85 ℃
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Direct Lead
	Installation	Build-in
	PRI Wire preparation	0.5-1.5 [□]
	SEC Wire preparation	0.3-0.5 [□]
	Dimension	48.2*30*20mm (L*W*H)
Standards	Certification	TUV、CE、SAA
	Safety Standards	EN61347-1:2015,EN61347-2-13:2014/A1:2017, EN62493:2015,AS/NZS IEC61347.2.13:2018, AS/NZS61347.1:2016 Inc AI
	EMC Standards	EN IEC 55015:2019,EN IEC 55015:2019/A11:2019, EN IEC 61000-3-2:2019, EN 61000-3-3:2013/A1:2019,EN61547:2009
	Performance	EN62384
	Surge	L-N/ 1KV
Others	RoHS	complied to 2011/65/EU
	Life Time	50000h @ Ta/Tc
	Warranty	5years , F.R. < 10000ppm
	Noise	15cm <28dB

Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature.

2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the


EMC with end products again.

2. Trailing Edge Dimmer list approved by KGP


Manufacturer	Model	Q'ty of parallel connection
ABB	6519 U	13
ABB	6526 U	12
JUNG	1224 LED UDE	12
Berker	2861	12
JUNG	254 UDIE 1	13
JUNG	225 TDE	12
EGANT	U321V2	12
Schneider	SBD200LED	12
Schneider	SBD315RC	14
Merten	SBD200LED	12
Berker	2874	12
Eltako	EUD61NPL-230V	10
Eltako	EUD12NPN-UC	10
Eltako	EUD12D-UC	10
Eltako	EUD61NP-230V	10
Eltako	DTD55-230V-wg	10
Eltako	DTD55L-230V-wg	10
GIRA	Universal-LED-Dimmer Mini2440 00	9
EHMANN	LED-Dimmer T46.08	10
JUNG	DrehDimmer Unversal LED1731DD	10

Leading Edge Dimmer list only on request -/ or confirmed by KGP Electronics


3. Label (For example)

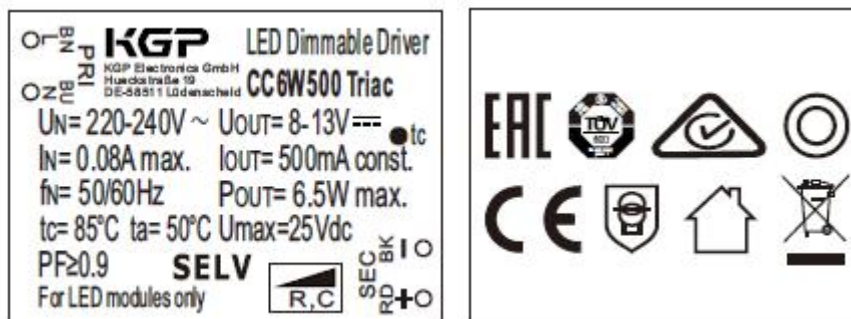


4. Dimming curve

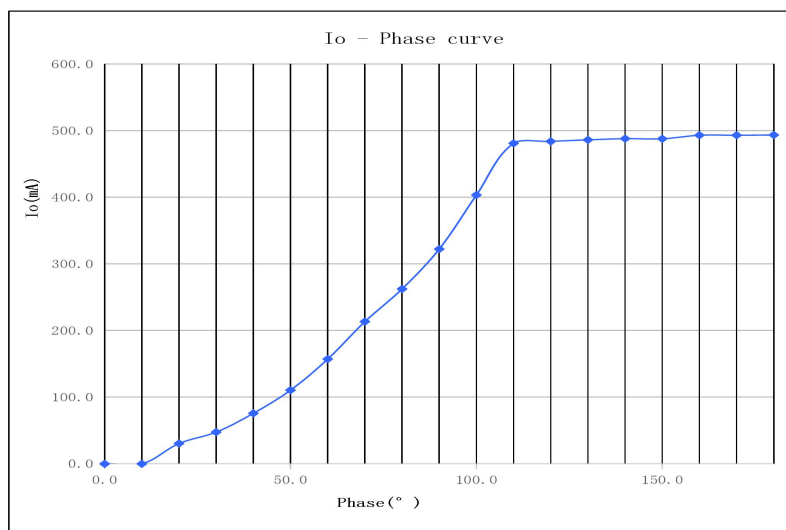

5. Lifetime curve

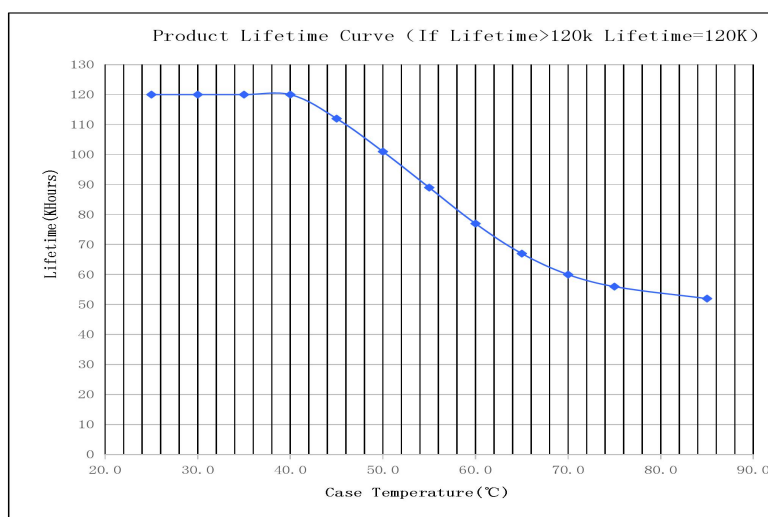


6. Dimension (Unit: mm)

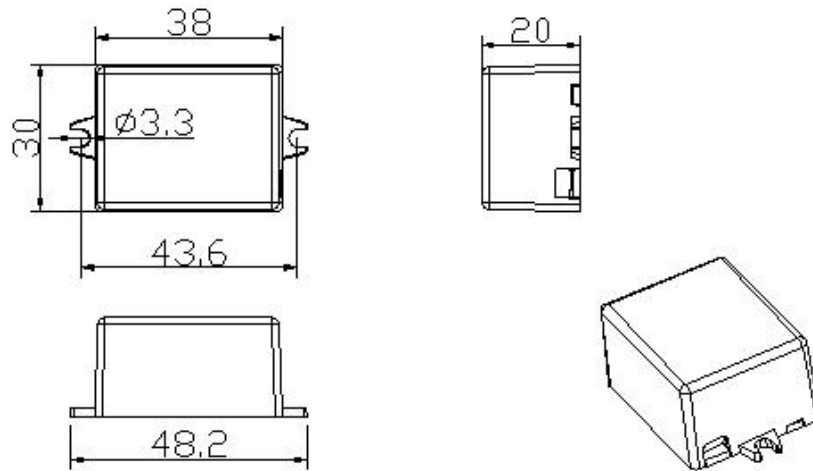

7. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
450*240*200	250	0.05	12.5	13.3

8. Wiring Diagram

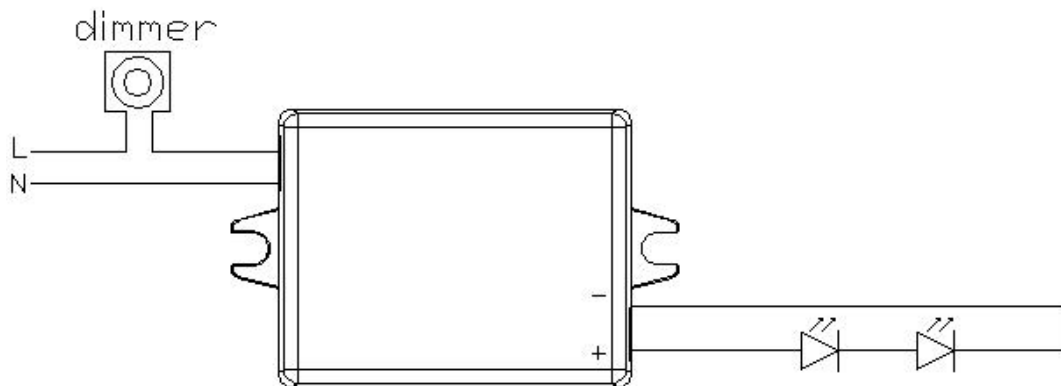

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)